

## RPM1800 60Hz

### Rating Range

<b>Standby:</b>	kW	224
	kVA	280
<b>Prime:</b>	kW	205
	kVA	256



## STANDARD FEATURES AND CHARACTERISTICS

### QUALITY STANDARDS

- 👁️ All generators comply with international design and quality standards, such as ISO8528 ( GB/T2820-97), ISO3046,BS.EN60034, BS5000, IEC34-1, GB755, VDE0530, CSA22-2, AS1359, as well as the requirements of ISO 9001 and ISO14001.
- 👁️ CE certificate for the alternator.
- 👁️ Diesel engine and alternator OEM authorization certificate and their quality assurance.
- 👁️ Other standards and certifications can be considered on request.

### ASSEMBLY

- 👁️ The engine and alternator are close coupled by means of an SAE flange . A full torsional analysis has been carried Out to guarantee no harmful vibration will occur.
- 👁️ Anti-vibration pads are affixed between engine alternator feet and the base frame. Thus ensuring complete Vibration isolation of the rotating assemblies and enabling the machine to be placed on an uneven surface without any detrimental effects.
- 👁️ For durability and corrosion resistance, all iron and steel surfaces of canopy fabrications have been treated for coating by grit blast cleaning. Then covered by special three layers painting which provides an excellent corrosion resistant surface.

### CONTROL SYSTEM AND PROTECTION

- 👁️ Controllers are available for all applications. It contains Deep Sea, Delf, Comap or other famous brands. According to their different functions, the control systems can be specified into key start controller model, automatic start control model and PCRC three remote control systems. See controller features inside.

### WARRANTY

- 👁️ SUPERWATT Company provides one-source responsibility for the generator set and accessories. Each SUPERWATT generating set has been got through 1.5 hours Load test for running 0%,25%,50%,75%,100% and 110% load, all protective devices and control function are simulated and checked before despatch.
- 👁️ Engine and Alternator are guaranteed for a period of 12months from the date of commissioning or 18 months from shipping, whichever occurs first.
- 👁️ Convenience for operation and maintenance, backed by PERKINS global service network.

#### Prime power(P)

These ratings are applicable for supplying continuous electrical power(at variable load) in lieu of commercially purchased power. There is no limitation to the annual hours of operation and this model can supply 10% over-load power for 1 hour in 12 hours.

#### Standby power(S)

Standby power is defined as the maximum power available, under the agreed operating conditions, for which the generating set is capable of delivering for up to 500h of operation per year.

## ● Engine Model 1506A-E88TAG2

### BASIC TECHNICAL DATA

Manufacturer	PERKINS
Number of cylinders	6
Cylinder arrangement	in-line
Cycle	Four stroke
Induction system	Air to air after cooled, turbocharged
Compression ratio	16.1:1
Bore(mm)	112
Stroke(mm)	149
Estimated total weight(dry)(kg)	1156

### FUEL CONSUMPTION

Power rating%	
Standby power (L/h)	59.5
100% prime power(L/h)	54.2
75% prime power(L/h)	41.8
50% prime power(L/h)	29.3

### EXHAUST SYSTEM

Maximum back pressure(kPa)	10
----------------------------	----

### TECHNICAL DATA

Engine rated speed(rpm)	1800
Gross engine power-prime(kW)	233
Gross engine power-Standby(kW)	255
Brake mean effective pressure(kPa)	1932
Mean piston speed(m/s)	8.9
Engine coolant flow(L/min)	190
Combustion air flow(m <sup>3</sup> /min)	18.6
Exhaust gas flow (max)(m <sup>3</sup> /min)	42.0
Exhaust gas temperature outlet(max)(°C)	444

### COOLING SYSTEM

Radiator	
Face area(m <sup>2</sup> )	0.49
Rows and materials	4 / Aluminium
Fins per inch and material	10 FPI
Pressure cap setting(kPa)	110
Fan	
Diameter(mm)	813
Drive ratio	1:1
Number of blades	9
Material	Plastic
Type	Pusher
Coolant	
Total system capacity(L)	29.6
Maximum top tank temperature(°C)	107
Thermostat operation range(°C)	87-98

### LUBRICATION SYSTEM

Total lubrication system capacity (dry engine) (L)	41Total
lubrication system capacity (oil change) (L)	39
Sump capacity only (L)	36
Oil temperature (in sump) maximum ( °C )	120
Oil temperature (in sump) normal continuous operation ( °C )	115
Lubricating oil pressure at bearings ( kPa )	370
Minimum oil pressure ( kPa )	250 kPa
Oil relief opens at ( kPa )	662 kPa
Oil filter screen spacing ( Microns )	23
Lubricating oil flow (L/min)	200
Oil consumption (highest rating)	<0.1% of fuel

### ELECTRIC SYSTEM

Type	Negative ground
Alternator	45 amps, 24 V
Starter motor	24 V

### INDUCTION SYSTEM

Maximum air intake restriction	
clean filter(kPa)	3.7
dirty filter(kPa)	6.2
air filter type	Dry paper element

### FUEL SYSTEM

Injection system	Direct
Injector type	Hydraulically Actuated
	Electronically Controlled Unit Injector
Governor type	Electronic
Injector pressure	185 MPa

### FUEL LIFT PUMP

Lift pump type	Gear driven
Lift pump delivery (L/h)	38
Lift pump delivery pressure(kPa)	140-655
Max. fuel inlet temperature(°C)	79

#### NOTE:

All data is based on:

- Engine operating with fuel system, water pump, lubricating oil pump, air cleaner and exhaust silencer; not included are battery charging alternator, fan, and optional driven components.
- Engine operating with fuel corresponding to grade No. 2-D per ASTM D975.
- ISO 3046, Part 1, Standard Reference Conditions of:
  - Barometric Pressure : 100 kPa (29.53 in Hg)
  - Air Temperature : 25°C (77°F )
  - Altitude : 110 m (361 ft)
  - Relative Humidity : 30%
  - Air Intake Restriction : 254 mm H<sub>2</sub>O (10 in H<sub>2</sub>O)
  - Exhaust Restriction : 51 mm Hg (2 in Hg)

N/A: Not Available

TBD: To Be Determined

CP: Continuous power

FSP: Fuel stop power

Altitude: Derate 2.0% per 300m(984 ft.) elevation above 1000m(3279 ft.) up to a maximum elevation of 2450m(8000 ft.).

More than 2450m(8000ft), please contacts with us or our dealer seek the help.

Temperature: Derate 6.0% per 11°C(20°F) temperature above 40°C(104°F).

<b>Alternator manufacturer</b>	<b>Stamford/Meccalte/Leroy-somer</b>
<b>Frequency and Speed</b>	60Hz/1800rp
<b>Voltage (V)</b>	220
<b>Prime capacity(kVA)</b>	300
<b>Prime power(kW)</b>	240
<b>Power efficiency(%)</b>	94.3
<b>Voltage regulation</b>	± 0.5%
<b>Rated power factor</b>	0.8
<b>Stator winding</b>	2/3
<b>Maximum overspeed</b>	2250min <sup>-1</sup>
<b>Sustained short circuit</b>	300%(3IN):20S
<b>Protection class</b>	IP23

Alternators meet the requirement of BS EN 60034 and the relevant section of other international standards such as BS5000, VDE 0530, NEMA MG1-32, IEC34, CSAC22.2-100, As1359, and other standards and certifications can be considered on request.

The 2/3 pitch design avoids excessive neutral currents. With the 2/3 pitch and carefully selected pole and tooth designs, ensures very low waveform distortion.

Brushless alternator with brushless pilot exciter for excellent load response.


The insulation system is class H, easy paralleling with mains or other generators, standard 2/3 pitch stator windings avoid excessive neutral currents.

Backed by worldwide service network.

## Dimensions and Weights

### OPEN STYLE

Overall Size, L×W×H,mm 3035×900×1525  
 Weight(radiator model),net,kg 2135

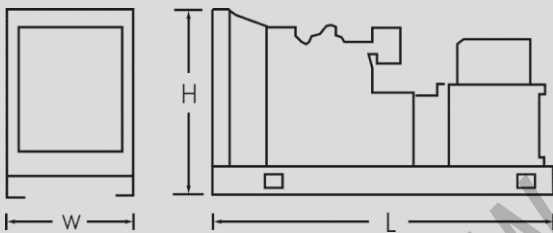

### EDEN STYLE

Overall Size, L×W×H,mm 3800×1130×2150  
 Weight(radiator model),net,kg 3195



### EVER-O STYLE

Overall Size, L×W×H,mm 3920×1380×2220  
 Weight(radiator model),net,kg 3256



NOTE: This drawing is provided for reference only and should not be used for planning installation. Contact your local distributor for more detailed information.

### Control System:

The DSE6120 Auto Mains (Utility) Failure Control Module are suitable for a wide variety of single gen-set applications.


Monitoring engine speed, oil pressure, coolant temperature, frequency, voltage, current, power and fuel level, the modules give comprehensive engine and alternator protection. This is indicated on a large back-lit LCD text display via an array of warning, electrical trip and shutdown alarms in multiple languages.

Electronic J1939 (CAN) and non-electronic MPU and alternator sensing engine support for diesel, gas and petrol engines all in one variant. With a number of flexible inputs, outputs and protections, the modules can be easily adapted to suit a wide range of applications.

Through USB Communication both modules can be configured using the DSE Configuration Suite PC Software or through the module's front panel editor.

Using the DSE Configuration Suite PC Software the controller is easy to use and configure which allows alteration of operating parameters, sequences, timers and alarms.

### Description For Module DSE6120:

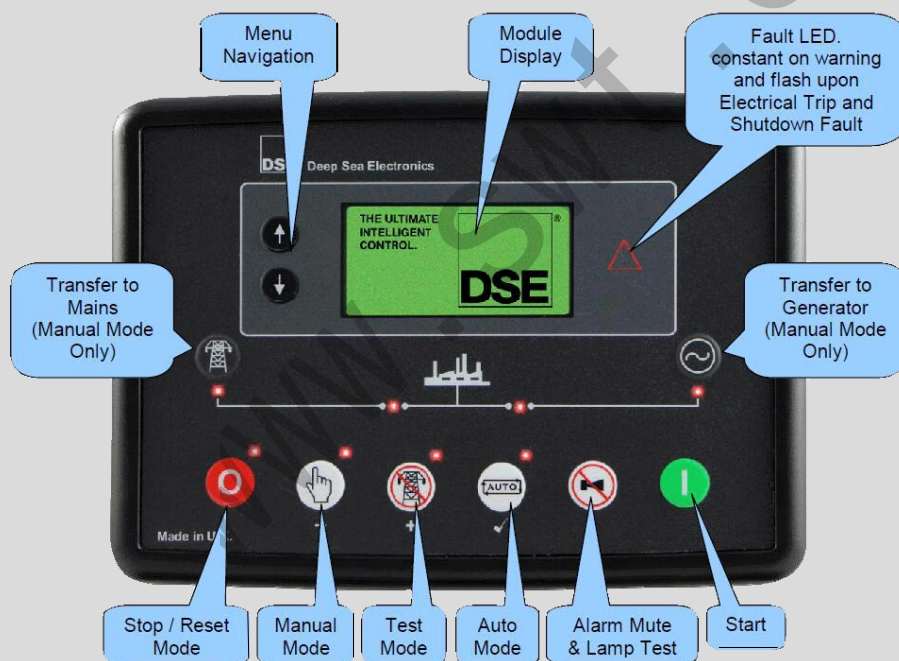

### Key Benefits:

Automatically transfers between mains (utility) and generator

Increased input and output expansion capability via DSENet®

Hours counter provides accurate information for monitoring and maintenance periods

User-friendly set-up and button layout for ease of use Multiple parameters are monitored simultaneously which are clearly displayed on a large back-lit text display via multiple languages

The module can be configured to suit a wide range of Applications

Compatible with a wide range of CAN engines including Tier 4

Uses DSE Configuration Suite PC Software for simplified configuration

Licence-free PC software

IP65 rating (with optional gasket) offers increased resistance to water ingress

Standard functions	Shutdown	Warning
Engine Control	Loss of Speed Signal	Alternator Under / Over Voltage
Generator Monitoring	Alternator Under / Over Voltage	Alternator Under/ Over Frequency
Generator Protection	Alternator Under/ Over Frequency	Mains Under / Over Voltage
Engine Monitoring	Mains Under / Over Voltage	Mains Under/ Over Frequency
Clear Text Display	Mains Under/ Over Frequency	Under / Over Speed
	Under / Over Speed	Low Oil Pressure Pre-Alarm
	Low Oil Pressure	High Engine Temperature Pre-Alarm
	High Engine Temperature	High/Low Battery Voltage
	Phase Sequence Electrical (Option)	Over-current
	Earth Fault (Option)	Periodic maintenance